


Glassfibre-insulated heating tape

Isopad IT-S45 is a preterminated, flexible heating tape consisting of a glassfibre insulated, flexible fabric weave with interior heating conductors. The protective overbraid of the coiled heating conductors

meets the requirements of Protection Class I.

The temperature depends on the power and application. Please make sure that the heating tape does not exceed the maximum withstand temperature.

This heating tape is typically used for heating up and compensating for heat losses on short pipes and small-sized structures. The heating tape is not moisture-protected and must only be used in dry areas.

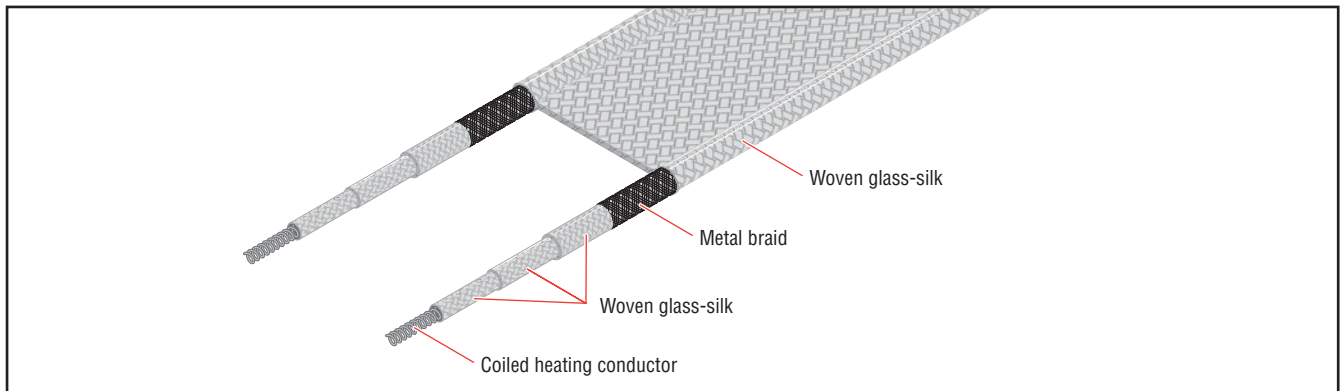

Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP20
Electrical protection class	Class I
Maximum withstand temperature (power off)	450°C
Storage temperature	-40 to +50°C
Minimum installation temperature	-40°C

Standard Manufacturing Sizes

Width	30 mm ±10%
Thickness	5 mm ±10%

Heater Construction

Type	Resistance heating cable
Material	Nickel-chrome-alloy
Material of insulation	Glass-silk
Material of outer sheath	Copper-nickel braid
Carrier	Glass-silk woven fabric

Lead Connection

Connection length	1.0 m
-------------------	-------

Lead Connection

Cross section	2 x 1.0 mm ²
Maximum operating temperature	200°C
Insulation material	PTFE

Technical Data

Frequency	50-60 Hz
Nominal operating voltage	230 Vac
Power per meter	250 W/m
Maximum operating temperature	450°C
Minimum bend radius	15 mm
Minimum spacing	5 mm

Ordering Information

	Part number	Length⁽¹⁾ (m)	Nominal Power⁽²⁾ (W)	Nominal Voltage (Vac)
	386552-000	0.5	100	230
	542364-000	1.0	250	230
	051330-000	1.5	375	230
Other lengths and power specifications, etc., available upon request	111280-000	2.0	500	230
	870574-000	2.5	625	230
	873740-000	3.0	750	230
	596276-000	4.0	1000	230
	932450-000	5.0	1250	230

⁽¹⁾ Tolerances <2000 mm ± (1% + 50 mm)
>2000 mm ± (2% + 100 mm)

⁽²⁾ Tolerances ±10%



France :
THERMOCOAX SAS
40 Bd Henri Sellier
F 92156 SURESNES Cedex
Tél. : +33 1 41 38 80 50
Fax : +33 1 41 38 80 70
info@thermocoax.com

Germany :
THERMOCOAX ISOPAD GmbH
Englerstrasse 11
D-69 126 HEIDELBERG
Tél. : +49 6221 3043-0
Fax : +49 6221 3043-956
isopad.info@thermocoax.com

USA :
THERMOCOAX Inc.
6825 Shiloh Road East,
Ste B-3
ALPHARETTA, GA 30005
Tél. : +1 800 298 3345
Fax : +1 678 947 4450
info@thermocoax.us

UK :
THERMOCOAX UK Ltd.
Office N° 5
Manor Farm
Aubourn,
Lincolnshire LN5 9DX
Tél. : +44 (1522) 789 900
Fax : +44 (1522) 789 902
info-uk@thermocoax.com

CHINA :
法国热缆公司
四川省成都市蛟龙工业港双流园
区涪江路11座
电话 : 13701325459
info-china@thermocoax.com

Important : All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. THERMOCOAX makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. THERMOCOAX only obligations are those in the THERMOCOAX Standard Terms and Conditions of Sale for this product, and in no case will THERMOCOAX or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, THERMOCOAX reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.